客 户 图
Customer drawings

CN40-FUSE-MF-**

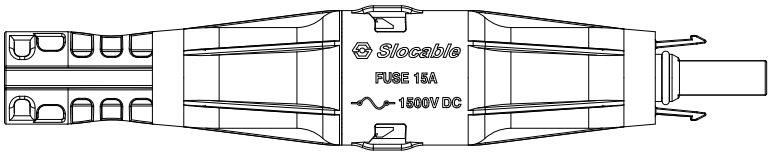

CN40-FUSE-F-**

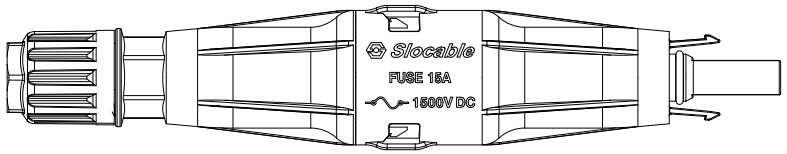

CN40-FUSE-M-**

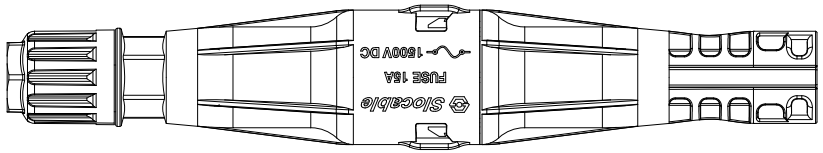

CN40-FUSE-N-**

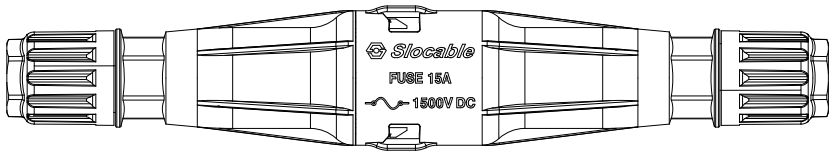

FUSE size:



NOTE:1. THE FUSE CANN'T BE REPLACED;
2. THE FUSE FROM THE FOLLOWING BRAND, MODEL OF THE CHOSEN
Yingrong: YRPV-30L/10X85(2~30A)(TUV APPROVED)
3. CONNECTOR COMPATIBLE MC4

绝缘材料/Insulation material	PPE / PA
额定电流/Rated current	MAX.30A (2...30A)
额定电压/Rated voltage	1500V DC
测试电压/Test voltage	8kV(50Hz,1min)
连接器接触电阻/Contact resistance	<5mΩ
金属导体材料/Contact material	铜，镀锡/Copper, Tin plated
保护等级/Degree of protection	IP68
安全等级/Safety class	II
阻燃等级/Flame class	UL94-V0
插入力/Insertion force	Max. 50N
拔出力/Withdrawal force	Min. 50N
环境温度范围/Ambient temperature range	-40°C...+85°C(IEC)
适配电缆规格/ Suitable cable cross sections	2.5~10.0mm² / 14~8AWG
适配保险丝尺寸(mm)/ Suitable for fuse size(mm)	10*85mm

CN40 - FUSE - ** - **

**A：保险丝规格 FUSE:2~30A

MF:公、母端 Male and Female ends
F: 母端带线 Female end band line
M: 公端带线 Male end band line
N: 两头带线 Two-end connection

内置光伏直流保险丝 Built-in photovoltaic DC fuse

CN40系列产品名称 CN40 series product name

				尺寸公差	角度公差	核准	万能 2023.12.15	材质				产品名称	1500V DC CN40保险丝座	Slocable Dongguan Slocable Photovoltaic Technology Co., Ltd.	
				X.0 ±1	X.0° ±1°	审核		表面处理				产品料号	CN40-FUSE-**-**		
				0.X ±0.5	0.X° ±0.5°	设计		角法		比例	1:1	专案编号		文件编号	DWG-23023-S01
版本	修订日期	修订内容	修订人	0.0X ±0.2	0.0X° ±0.2°	绘图	杨伟聪 2023.12.15	页次	1/1	单位	mm				