客 户 图
Customer drawings

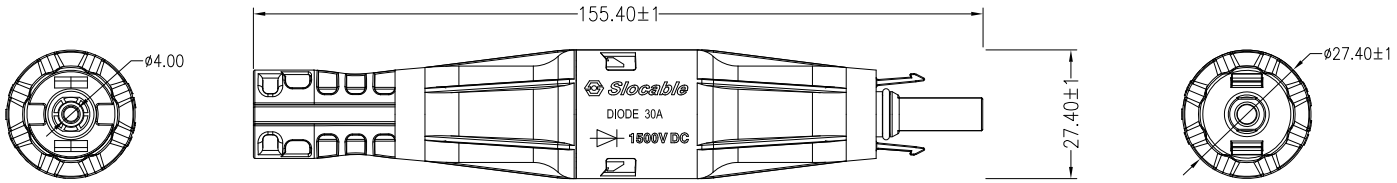

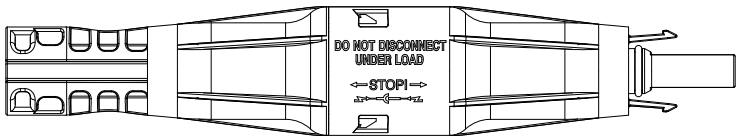

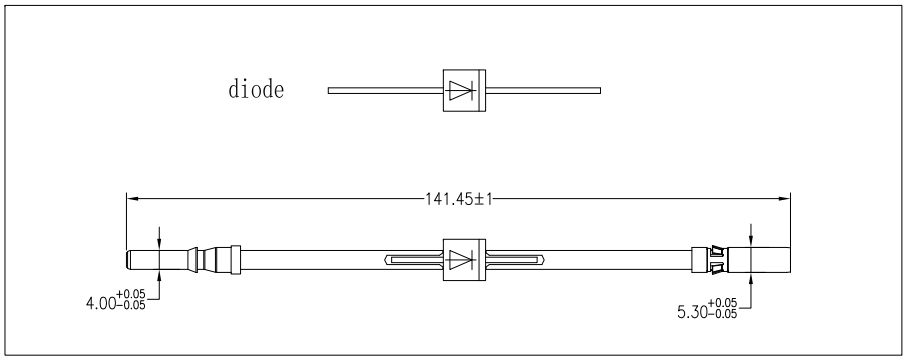

绝缘材料/Insulation material	PPE
额定电流/Rated current	MAX.30A (6...30A)
额定电压/Rated voltage	1500V DC
测试电压/Test voltage	8kV(50Hz,1min)
连接器接触电阻/Contact resistance	<0.5mΩ
金属导体材料/Contact material	铜，镀锡/Copper, Tin plated
保护等级/Degree of protection	IP68
安全等级/Safety class	II
阻燃等级/Flame class	UL94-V0
插入力/Insertion force	Max. 50N
拔出力/Withdrawal force	Min. 50N
环境温度范围/Ambient temperature range	-40°C...+85°C(IEC)

NOTE: 1. The diode can't be replaced.
2. Diode is 10A/15/20A/30A of 1500V DC.
3. Diode connector is compatible with MC4 type.

				尺寸公差	角度公差	核准		材质				产品名称	1500V DC CN40 Diode connector	Slocable Dongguan Slocable Photovoltaic Technology Co., Ltd.	
				X.0 ±0.50	X.0° ±1°	审核		表面处理				产品料号			
				0.X ±0.13	0.X° ±0.5°	设计		角法		比例	1:1	专案编号		文件编号	DWG-20023-S12
版本	修订日期	修订内容	修订人	0.0X ±0.05	0.0X° ±0.2°	绘图	万能 2024.06.27	页次	1/1	单位	mm				