客 户 图
Customer drawings

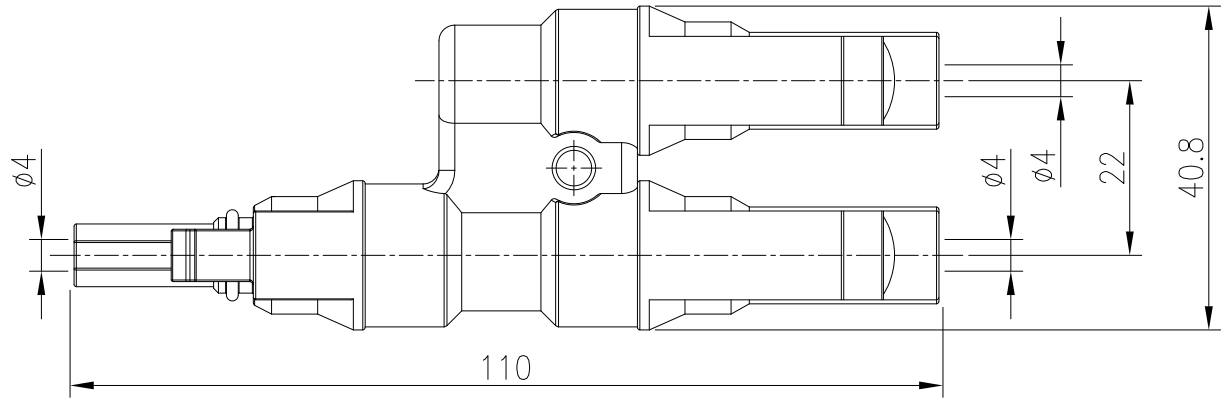

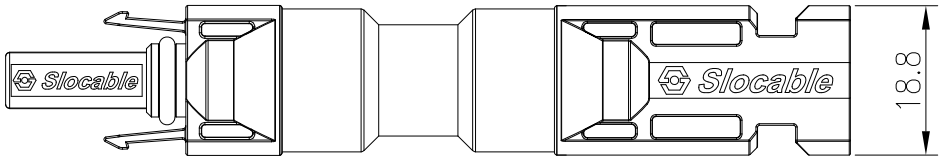

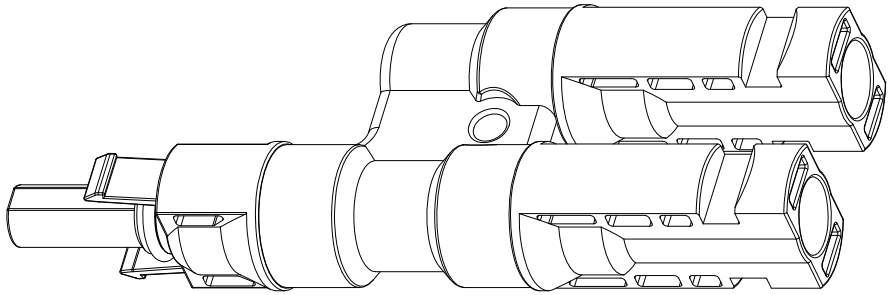

Insulation material	PPE
Rated current	50A(Max.)
Rated voltage	1500V(TUV)
Test voltage	8kV(50Hz,1min)
Contact resistance	<1mΩ
Contact material	Copper, Ag plated
Degree of protection	IP2X/IP67
Safety class	II
Flame class	UL94-V0
Insertion force	Max. 50N
Withdrawal force	Min. 50N
Ambient temperature range	-40°C...+85°C
Pin dimensions	ϕ4.0mm

				尺寸公差	角度公差	核准		材质		产品名称	C4 Branch connector 2Male 1Female	Slocable		
				X.0 ±1	X.0° ±1°	审核		表面处理		产品料号	BC40-2M1F	Dongguan Slocable Photovoltaic Technology Co., Ltd.		
				0.X ±0.5	0.X° ±0.5°	设计		角法		比例		专案编号	P-09015	文件编号	DWG-09015-S01
版本	修订日期	修订内容	修订人	0.0X ±0.2	0.0X° ±0.2°	绘图	万能 2018.09.01	页次	1/2	单位	mm			

客 户 图
Customer drawings

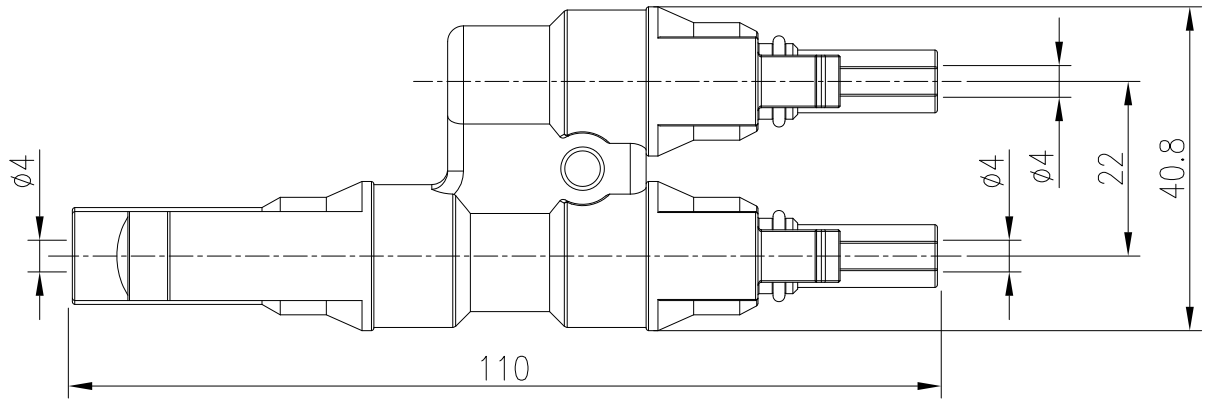

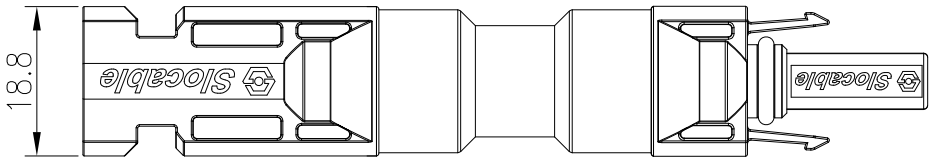

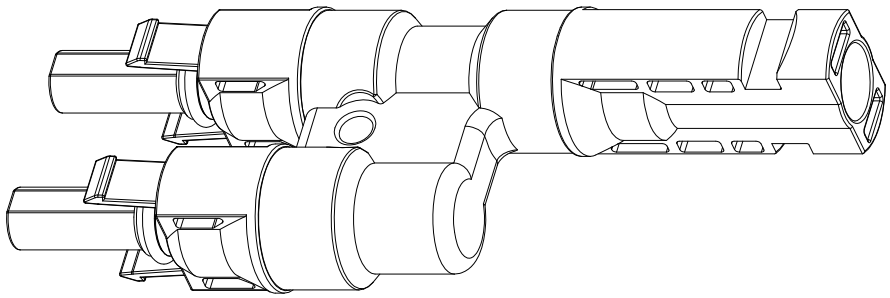

Insulation material	PPE
Rated current	50A(Max.)
Rated voltage	1500V(TUV)
Test voltage	8kV(50Hz,1min)
Contact resistance	<1mΩ
Contact material	Copper, Ag plated
Degree of protection	IP2X/IP67
Safety class	II
Flame class	UL94-V0
Insertion force	Max. 50N
Withdrawal force	Min. 50N
Ambient temperature range	-40°C...+85°C
Pin dimensions	ø4.0mm

				尺寸公差	角度公差	核准		材质				产品名称	C4 Branch connector 2Female 1Male	Slocable
				X.0 ±1	X.0° ±1°	审核		表面处理				产品料号	BC40-2F1M	Dongguan Slocable Photovoltaic Technology Co., Ltd.
				0.X ±0.5	0.X° ±0.5°	设计		角法		比例		专案编号	P-09015	文件编号 DWG-09015-S01
版本	修订日期	修订内容	修订人	0.0X ±0.2	0.0X° ±0.2°	绘图	万能 2018.09.01	页次	2/2	单位	mm			