


# 2PFG 1169 PV1-F 1×6.0mm<sup>2</sup>

## 规格 (Specifications)

*2 PFG 1169 PV1-F 1×6.0mm<sup>2</sup>*



## 截面图 (Cross Section Diagram)

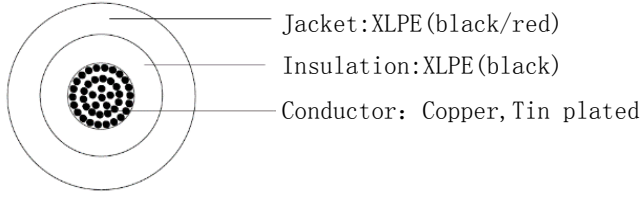

## 结构 (Construction)

型号 Type	导体 (Conductor)		绝缘 (Insulation)		护套 (Jacket)	
	芯线结构 Wire struct	导体直径 Conductor diameter	厚度 Thickness (mm)	直径 Diameter (mm)	厚度 Thickness (mm)	直径 Diameter (mm)
6.0mm <sup>2</sup>	81/0.265	2.75	0.9	4.5±0.2	1	6.5±0.2

## 印字 (Marking)

TUV 2PFG 1169 PV1-F 1×6.0mm<sup>2</sup> DONGGUAN SLOCABLE PV Cable  
www.slocable.com.cn

备注 (Remark):

### 产品说明 (Product Description)

- Tinned copper stranded wire
- XLPE insulation, black color
- XLPE Jacket, black/red

### 参考标准 (Reference Standard)

- 2PFG 1169 PV1-F

订货料号 (Order No.):

CA106B-PE03 (BLACK)

CA106R-PE03 (RED)

## 电气性能 (Electrical Characteristics)

- 1) 额定电压 (Rated voltage): 1000V DC
- 2) 额定电流 (Rated current): 60A
- 3) 最大导体温度 (Max. conductor temperature): +120°C
- 4) 工作环境 (Ambient temperature): -40~+90°C
- 5) 最大导体电阻 (Conductor Resistance(max.)): /
- 6) 绝缘强度 (Dielectric Strength(AC)): 6.5 KV/5Min.
- 7) 使用寿命 (Expected period of use): ≥25 years

## 物理性能 (Physical Characteristics)

- 1) 垂直燃烧 (Flame test): EN60332-1-2
- 2) 烟浓度 (Smoke density): IEC61034 (EN-50268)
- 3) 无卤 (Halogen free): IEC60754 (EN-50267)
- 4) 耐臭氧 (Ozone resistance): EN50396
- 5) 耐油 (Oil resistance): IEC60811
- 6) 抗紫外线 (UV resistant): HD605/A1

客户签字/盖章

(Autograph/Seal):

确认日期

(Date):

版本 (Rev.)	日期 (Date)	历史记录 (History Record)
A1.0	2018.01	/

A1.0

2018.01

/



**东莞市思普太阳能科技有限公司**  
Dongguan Slocable Photovoltaic Technology Co., Ltd

地址/Add: 广东省东莞市香山路大岭山华威科谷1栋

Huawei Scientific Valley, Xiangshan Road, Dalingshan Town,

Dongguan City, Guangdong Province, China

电话/TEL: (+86) - 769 - 22010201

网站/Website: http://www.slocable.com.cn

编制  
(Prepared By)

审核  
(Reviewed By)

批准  
(Approved By)